

Topics

Points, Vectors, Vertices, Coordinates

Dot Products, Cross Products

Lines, Planes, Intercepts

References

Many texts cover the linear algebra used for 3D graphics ...

... the texts below are good references, Akenine-Möller is more relevant to the class.

J. Ström, K. Åström, and T. Akenine-Möller, “immersive linear algebra,” v.0.73,
<http://immersivemath.com/ila/index.html>.


Appendix A and Chapter 4 in T. Akenine-Möller, E. Haines, N. Hoffman, “Real-Time Rendering,” Third Edition, A. K. Peters Ltd.

Appendix A in Foley, van Dam, Feiner, Huges, “Computer Graphics: Principles and Practice,” Second Edition, Addison Wesley.

Point:

Indivisible location in space.

$$\text{E.g., } P_1 = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}, P_2 = \begin{bmatrix} 4 \\ 5 \\ 6 \end{bmatrix}$$

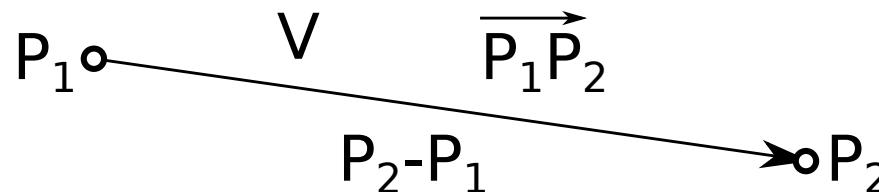*Vector:*

Difference between two points.

$$\text{E.g., } V = P_2 - P_1 = \overrightarrow{P_1 P_2} = \begin{bmatrix} 4 - 1 \\ 5 - 2 \\ 6 - 3 \end{bmatrix} = \begin{bmatrix} 3 \\ 3 \\ 3 \end{bmatrix}.$$

Equivalently: $P_2 = P_1 + V$.

Don't confuse points and vectors!

Point-Related Terminology

Will define several terms related to points.

At times they may be used interchangeably.

Point:

A location in space.

Coordinate:

A representation of location.

Vertex:

Term may mean point, coordinate, or part of graphical object.

As used in class, vertex is a less formal term.

It might refer to a point, its coordinate, and other info like color.

Coordinate:

A representation of where a point is located.

Familiar representations:

3D Cartesian $P = (x, y, z)$.

2D Polar $P = (r, \theta)$.

In class we will use 3D *homogeneous coordinates*.

Homogeneous Coordinate:

A coordinate representation for points in 3D space consisting of four components. . .
... each component is a real number. . .
... and the last component is non-zero.

Representation: $P = \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$, where $w \neq 0$.

P refers to same point as Cartesian coordinate $(x/w, y/w, z/w)$.

To save paper sometimes written as (x, y, z, w) .

Each point can be described by many homogeneous coordinates ...

$$\dots \text{ for example, } (10, 20, 30) = \begin{bmatrix} 10 \\ 20 \\ 30 \\ 1 \end{bmatrix} = \begin{bmatrix} 5 \\ 10 \\ 15 \\ 0.5 \end{bmatrix} = \begin{bmatrix} 20 \\ 40 \\ 60 \\ 2 \end{bmatrix} = \begin{bmatrix} 10w \\ 20w \\ 30w \\ w \end{bmatrix} = \dots$$

... these are all equivalent so long as $w \neq 0$.

Column matrix $\begin{bmatrix} x \\ y \\ z \\ 0 \end{bmatrix}$ could not be a homogeneous coordinate ...

... but it could be a vector.

Why not just Cartesian coordinates like (x, y, z) ?

The w simplifies certain computations.

Confused?

Then for a little while pretend that $\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$ is just (x, y, z) .

Homogenized Homogeneous Coordinate

A homogeneous coordinate is *homogenized* by dividing each element by the last.

For example, the homogenization of $\begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix}$ is $\begin{bmatrix} x/w \\ y/w \\ z/w \\ 1 \end{bmatrix}$

Homogenization is also known as *perspective divide*.

Vector Arithmetic

Points just sit there, it's vectors that do all the work.

In other words, most operations defined on vectors.

Point/Vector Sum

The result of adding a point to a vector is a point.

Consider point with homogenized coordinate $P = (x, y, z, 1)$ and vector $V = (i, j, k)$.

The sum $P + V$ is the point with coordinate

$$\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} + \begin{bmatrix} i \\ j \\ k \end{bmatrix} = \begin{bmatrix} x + i \\ y + j \\ z + k \\ 1 \end{bmatrix}$$

This follows directly from the vector definition.

Scalar/Vector Multiplication

The result of multiplying scalar a with a vector is a vector...
... that is a times longer but points in the same or opposite direction...
... if $a \neq 0$.

Let a denote a scalar real number and V a vector.

The *scalar vector product* is
$$aV = a \begin{bmatrix} x \\ y \\ z \end{bmatrix} = \begin{bmatrix} ax \\ ay \\ az \end{bmatrix}.$$

Vector/Vector Addition

The result of adding two vectors is another vector.

Let $V_1 = \begin{bmatrix} x_1 \\ y_1 \\ z_1 \end{bmatrix}$ and $V_2 = \begin{bmatrix} x_2 \\ y_2 \\ z_2 \end{bmatrix}$ denote two vectors.

The *vector sum*, denoted $U + V$, is $\begin{bmatrix} x_1 + x_2 \\ y_1 + y_2 \\ z_1 + z_2 \end{bmatrix}$

Vector subtraction could be defined similarly...

... but doesn't need to be because we can use scalar/vector multiplication: $V_1 - V_2 = V_1 + (-1 \times V_2)$.

Vector Addition Properties

Vector addition is associative:

$$U + (V + W) = (U + V) + W.$$

Vector addition is commutative:

$$U + V = V + U.$$

Vector Magnitude

The *magnitude* of a vector is its length, a scalar.

The *magnitude* of $V = \begin{bmatrix} x \\ y \\ z \end{bmatrix}$ denoted $\|V\|$, is $\sqrt{x^2 + y^2 + z^2}$.

The magnitude is also called the *length* and the *norm*.

Vector V is called a *unit vector* if $\|V\| = 1$.

A vector is *normalized* by dividing each of its components by its length.

The notation \hat{V} indicates $V/\|V\|$, the normalized version of V .

The Vector Dot Product

The dot product of two vectors is a scalar.

Roughly, it indicates how much they point in the same direction.

Consider vectors $V_1 = \begin{bmatrix} x_1 \\ y_1 \\ z_1 \end{bmatrix}$ and $V_2 = \begin{bmatrix} x_2 \\ y_2 \\ z_2 \end{bmatrix}$.

The *dot product* of V_1 and V_2 , denoted $V_1 \cdot V_2$, is $x_1x_2 + y_1y_2 + z_1z_2$.

What a Dot Product Does

Let


V be some arbitrary vector and

\hat{d} be a unit vector.

Then $V \cdot \hat{d} \dots$

\dots measures the length of the vector $V \dots$

\dots in the direction of \hat{d} .

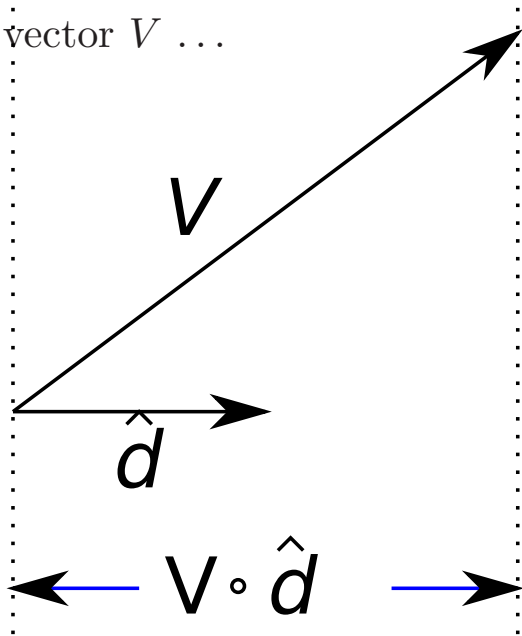

Let U , V , and W be vectors.

Let a be a scalar.

Miscellaneous Dot Product Properties

$$(U + V) \cdot W = U \cdot W + V \cdot W$$

$$(aU) \cdot V = a(U \cdot V)$$

$$U \cdot V = V \cdot U$$

$$\text{abs}(U \cdot U) = \|U\|^2$$

Orthogonality

The more casual term is perpendicular.

Vectors U and V are called *orthogonal* iff $U \cdot V = 0$.

This is an important property for finding intercepts.

Angle

Let U and V be two vectors.

Then $U \cdot V = \|U\| \|V\| \cos \phi \dots$


\dots where ϕ is the smallest angle between the two vectors.

Cross Product

The cross product of two vectors results in a vector orthogonal to both.

The *cross product* of vectors V_1 and V_2 , denoted $V_1 \times V_2$, is

$$V_1 \times V_2 = \begin{bmatrix} x_1 \\ y_1 \\ z_1 \end{bmatrix} \times \begin{bmatrix} x_2 \\ y_2 \\ z_2 \end{bmatrix} = \begin{bmatrix} y_1 z_2 - z_1 y_2 \\ z_1 x_2 - x_1 z_2 \\ x_1 y_2 - y_1 x_2 \end{bmatrix}.$$

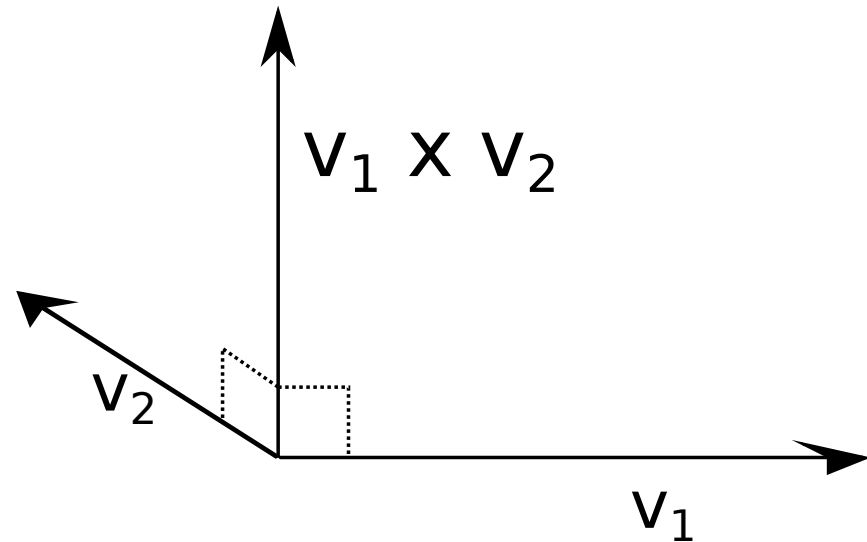

Cross Product Properties

Let U and V be two vectors and let $W = U \times V$.

Then both U and V are orthogonal to W .

$$\|U \times V\| = \|U\| \|V\| \sin \phi.$$

$$U \times V = -V \times U.$$

$$(aU + bV) \times W = a(U \times W) + b(V \times W).$$

$$U \times (V \times W) = (U \cdot W)V - (U \cdot V)W.$$

If U and V define a parallelogram, its area is $\|U \times V\| \dots$

\dots if they define a triangle its area is $\frac{1}{2}\|U \times V\|$.

Line Definition


A line will be defined in terms of a point and a non-zero vector.

Line:

A set of points generated from a given point, P_1 , and vector, v : $\{S \mid P_1 + tv, \forall t \in \mathbb{R}\}$.

One can imagine “drawing” the line by varying the parameter t .

Illustration of defining a line in terms of two points:

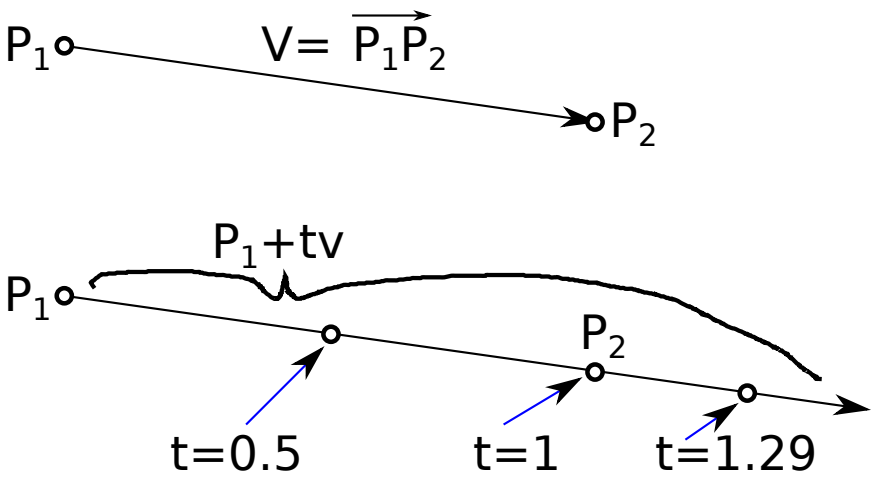

Plane Definition

Point P and vector \vec{n} define a *plane* in which a point S is on the plane iff $\overrightarrow{PS} \cdot \vec{n} = 0$.

The vector \vec{n} is referred to as a *normal*.

Plane/Line Intercept

Consider the plain defined by point P and vector \vec{n} , and the line defined by point L and vector \vec{v} ; let S denote the point at which the line intercepts the plane (if any).

Since S is on the line,

$$S = L + t \vec{v}.$$

Since S is on the plane,

$$\overrightarrow{SP} \cdot \vec{n} = 0$$

Substituting for S and solving for t :

$$\begin{aligned} \overrightarrow{(L + t \vec{v})P} \cdot \vec{n} &= 0 \\ (P - L - t \vec{v}) \cdot \vec{n} &= 0 \\ (\overrightarrow{LP} - t \vec{v}) \cdot \vec{n} &= 0 \\ t &= \frac{\overrightarrow{LP} \cdot \vec{n}}{\vec{v} \cdot \vec{n}} \end{aligned}$$

Use this expression for t to find S

$$S = L + \frac{\overrightarrow{LP} \cdot \vec{n}}{\vec{v} \cdot \vec{n}} \vec{v}$$

Problem: *A light model specifies that in a scene with a light of brightness b (scalar) at location L (coordinate), and a point P on a surface with normal \hat{n} , the **lighted color**, c , of P (a scalar) will be the dot product of the surface normal with the direction to the light divided by the distance to the light.*


Restate this as a formula.

Estimate the number of floating point operations in a streamlined computation.

Solution:

Formula:
$$c = b \widehat{PL} \cdot \hat{n} \frac{1}{\|\overrightarrow{PL}\|}.$$

Problem: Find a parametric description $S(\theta)$ of a circle that passes through point P , with its center at C , and facing direction* \hat{n} .

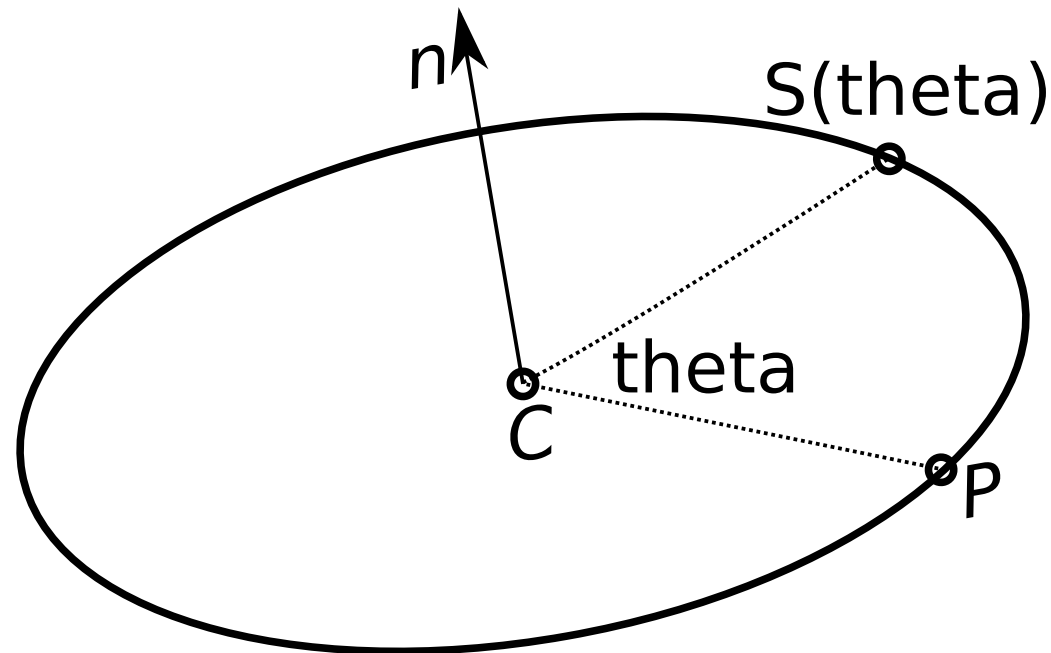

```
for ( float theta = 0; theta < 2 * M_PI; theta += delta_theta )
{
    pCoord pos = S(theta);    // Need to find S(theta).
    // Do something with pos..
}
```

* The quantity \hat{n} is not necessarily orthogonal to \overrightarrow{CP} .

Sample problem, continued.


First, let's solve the easy version of the problem: 2D, circle at origin.

To make it easy:

$$C = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}, P = \begin{bmatrix} r \\ 0 \\ 0 \end{bmatrix} \text{ and } \hat{n} = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

Parametric formula:

$$S(\theta) = \begin{bmatrix} r \cos \theta \\ r \sin \theta \\ 0 \end{bmatrix}$$

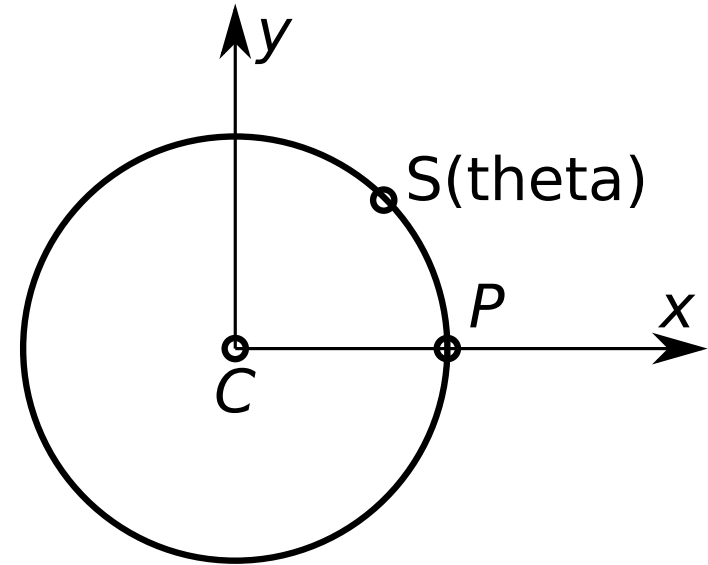


Use of parametric formula in code:

```
for ( float theta = 0; theta < 2 * M_PI; theta += delta_theta )
{
    pCoor point_S( r * cos(theta), r * sin(theta), 0 );
    // Do something with point_S..
}
```

Re-write formula as C plus two vectors:

$$\begin{aligned} S(\theta) &= C + \begin{bmatrix} r \cos \theta \\ r \sin \theta \\ 0 \end{bmatrix} \\ &= C + r \cos \theta \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} + r \sin \theta \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix} \\ &= C + r \cos(\theta) \hat{a}_x + r \sin(\theta) \hat{a}_y, \end{aligned}$$

where $\hat{a}_x = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$ and $\hat{a}_y = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}$.

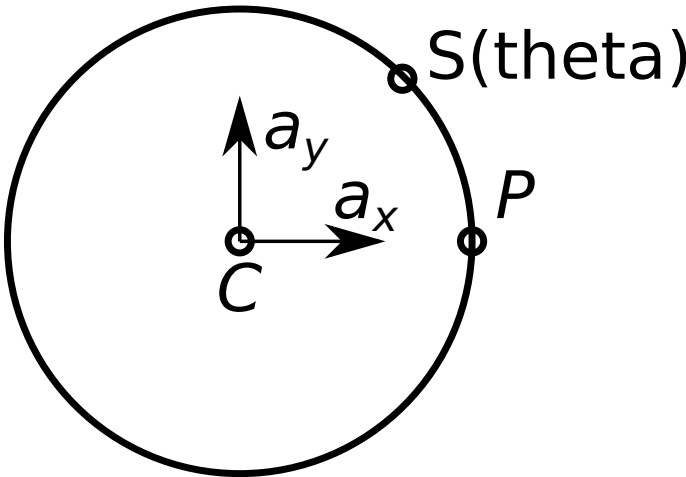

The converted formula again:

$$S(\theta) = C + r \cos(\theta) \hat{a}_x + r \sin(\theta) \hat{a}_y$$

Suppose instead $\hat{a}_x = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$ and $\hat{a}_y = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$

Then circle would be on xz plain instead of the xy plain.

We know that \hat{a}_y points along the z axis, ...

... but the parametric formula thinks its the y axis.

Key Observation:

A circle can be drawn in any orientation by choosing \hat{a}_x and \hat{a}_y appropriately.

The original problem: *Find a parametric description $S(\theta)$ of a circle that passes through point P , with its center at C , and facing in direction \hat{n} .*

The formula:


$$S(\theta) = C + r \cos(\theta) \hat{a}_x + r \sin(\theta) \hat{a}_y$$

Need to find \hat{a}_x , \hat{a}_y , and r :

Clearly, $r = \|\overrightarrow{CP}\|$

We can set $\hat{a}_x = \frac{1}{r} \overrightarrow{CP}$.

And then $\hat{a}_y = \hat{n} \times \hat{a}_x$.

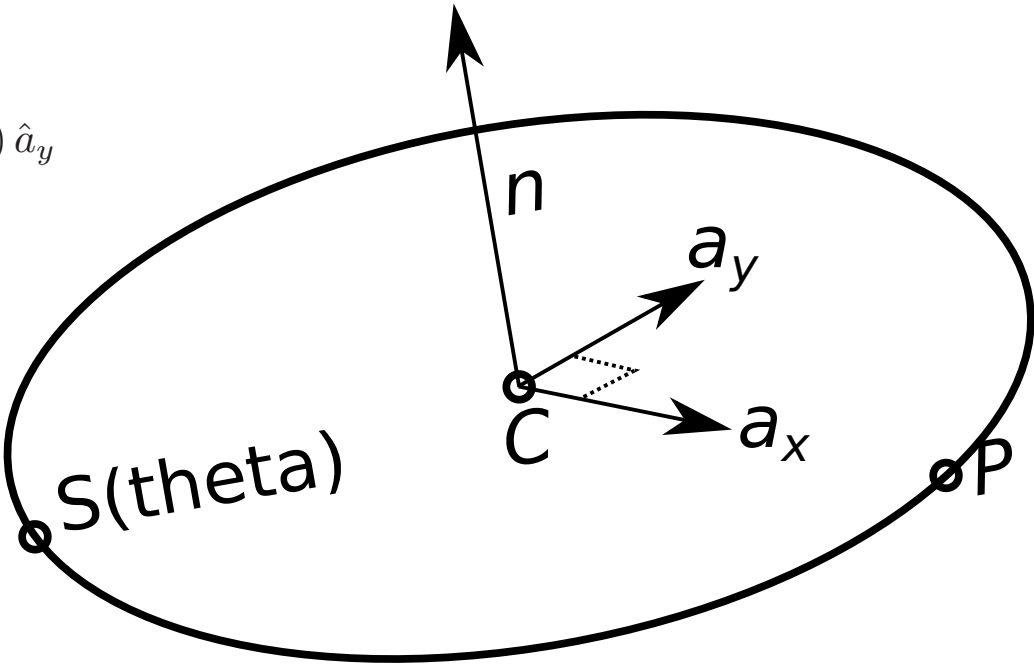

Recall:


$$r = \|\overrightarrow{CP}\|, \quad \hat{a}_x = \frac{1}{r}\overrightarrow{CP}, \quad \hat{a}_y = \hat{a}_x \times \hat{n}.$$

Code for circle:

```
// Given:
pNorm n(1,2,3);
pCoor C(4,5,6);
pCoor P(7,8,9);

// Compute:
pNorm ax(C,P);           // ax is a unit vector from C to P.
pNorm ay = cross(n,ax);  // Normalize in case n is not orthogonal to CP.
float r = ax.magnitude;

// Construct points on circle:
for ( float theta = 0; theta < 2 * M_PI; theta += delta_theta )
{
    pCoor pos = C + r * cos(theta) * ax + r * sin(theta) * ay;
    // Do something with pos..
}
```

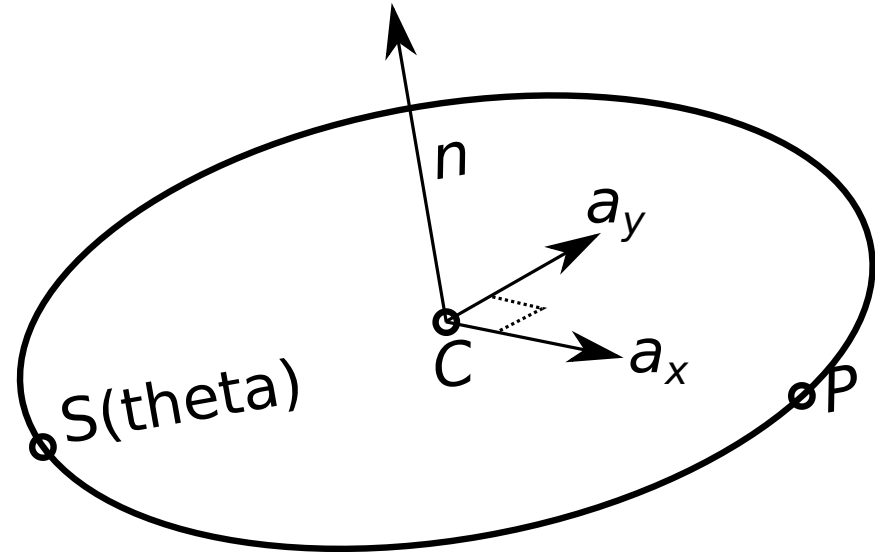

Transformation:

A mapping (conversion) from one coordinate set to another (*e.g.*, from feet to meters) or to a new location in an existing coordinate set.

Particular Transformations to be Covered

Translation: Moving things around.

Scale: Change size.

Rotation: Rotate around some axis.

Projection: Moving to a surface.

Transform by multiplying 4×4 matrix with coordinate.

$$P_{\text{new}} = M_{\text{transform}} P_{\text{old}}.$$

Scale Transform

$$S(s) = \begin{pmatrix} s & 0 & 0 & 0 \\ 0 & s & 0 & 0 \\ 0 & 0 & s & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

$$S(s, t, u) = \begin{pmatrix} s & 0 & 0 & 0 \\ 0 & t & 0 & 0 \\ 0 & 0 & u & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

$S(s)$ stretches an object s times along each axis.

$S(s, t, u)$ stretches an object s times along the x -axis, t times along the y -axis, and u times along the z -axis.

Scaling centered on the origin.

Example of Scale Transform

Given:

$$S(5) = \begin{pmatrix} 5 & 0 & 0 & 0 \\ 0 & 5 & 0 & 0 \\ 0 & 0 & 5 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \quad \text{and} \quad P = \begin{bmatrix} a \\ b \\ c \\ 1 \end{bmatrix}.$$

Compute Q , the result of transforming P by $S(5)$:

$$Q = S(5)P = \begin{pmatrix} 5 & 0 & 0 & 0 \\ 0 & 5 & 0 & 0 \\ 0 & 0 & 5 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{bmatrix} a \\ b \\ c \\ 1 \end{bmatrix} = \begin{bmatrix} 5a + 0b + 0c + 0 \times 1 \\ 0a + 5b + 0c + 0 \times 1 \\ 0a + 0b + 5c + 0 \times 1 \\ 0a + 0b + 0c + 1 \times 1 \end{bmatrix} = \begin{bmatrix} 5a \\ 5b \\ 5c \\ 1 \end{bmatrix}$$

Code:

```
pMatrix_Scale S(5); // Construct the scale matrix.
pCoor P(a,b,c);     // Construct the coordinate.
pCoor Q = S * P;
```

Rotation Transformations

$R_x(\theta)$ rotates around x axis by θ ; likewise for R_y and R_z .

$$R_x(\theta) = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta & 0 \\ 0 & \sin \theta & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

$$R_y(\theta) = \begin{pmatrix} \cos \theta & 0 & \sin \theta & 0 \\ 0 & 1 & 0 & 0 \\ -\sin \theta & 0 & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

$$R_z(\theta) = \begin{pmatrix} \cos \theta & -\sin \theta & 0 & 0 \\ \sin \theta & \cos \theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

Translation Transform

$$T(s, t, u) = \begin{pmatrix} 1 & 0 & 0 & s \\ 0 & 1 & 0 & t \\ 0 & 0 & 1 & u \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

Moves point s units along x axis, etc.

Example: Show arithmetic for $Q = T(s, t, u)P$ where $P = \begin{bmatrix} a \\ b \\ c \\ 1 \end{bmatrix}$

$$Q = T(s, t, u)P = \begin{pmatrix} 1 & 0 & 0 & s \\ 0 & 1 & 0 & t \\ 0 & 0 & 1 & u \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{bmatrix} a \\ b \\ c \\ 1 \end{bmatrix} = \begin{bmatrix} 1a + 0b + 0c + s \times 1 \\ 0a + 1b + 0c + t \times 1 \\ 0a + 0b + 1c + u \times 1 \\ 0a + 0b + 0c + 1 \times 1 \end{bmatrix} = \begin{bmatrix} a + s \\ b + t \\ c + u \\ 1 \end{bmatrix}$$

Code:

```
pCoor P(a,b,c);  
pMatrix_Translate T(s,t,u);  
pCoor Q = T * P;
```

Computational Efficiency of Translation Transform

Using Transform:

$$Q = T(s, t, u)P.$$

16 multiplications, 12 additions.

Using Vector Addition:

$$Q = P + \begin{bmatrix} s \\ t \\ u \end{bmatrix}$$

0 multiplications, 3 additions.

Conclusion:

If *all* we want to do is translations, don't use matrix version ($T(s, t, u)$).

Matrix version makes sense if we want to combine transforms.

Often **multiple transforms** are applied to a point ...

... for example, a rotation, scale, and translation:

$$Q_a = R_x(\theta) P, \quad Q_b = S(1.23) Q_a, \quad Q = T(4, 5, 6) Q_b.$$

Total Computation: $3 \times 4^2 = 48$ multiplies.

Transformations can be **combined**:

First Compute $M = T(4, 5, 6) S(1.23) R_x(\theta)$. 2×4^3 multiplies.

$$Q = MP \quad 4^2 \text{ multiplies}$$

Total Computation: $2 \times 4^3 + 4^2 = 144$ multiplies. Isn't that worse?

Often the same set of transforms applied to **multiple points**:

$$Q_i = MP_i \text{ for } 0 \leq i < n. \quad \text{Suppose } n = 100.$$

Computation using just M : $2 \times 4^3 + n4^2$. $2 \times 4^3 + 100 \times 4^2 = 1728$.

Computation using R , S , and T : $3n4^2$. $3 \times 100 \times 4^2 = 4800$.

Miscellaneous Matrix Multiplication Math

Let M and N denote arbitrary 4×4 matrices.

Identity Matrix

$$I = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}.$$

$$IM = MI = M.$$

Matrix Inverse

Matrix A is an inverse of M iff $AM = MA = I$.

Will use M^{-1} to denote inverse.

Not every matrix has an inverse.

Computing inverse of an arbitrary matrix expensive ...

... but inverse of some matrices are easy to compute ...

... for example, $T(x, y, z)^{-1} = T(-x, -y, -z)$.

Matrix Multiplication Rules

Is associative: $(LM)N = L(MN)$.


Is not commutative: $MN \neq NM$ for arbitrary M and N .

$(MN)^{-1} = N^{-1}M^{-1}$. (Note change in order.)

Projection Transform:

A transform that maps a coordinate to a space with fewer dimensions.

*A projection transform maps a 3D coord. from our virtual world (such as P_1) ...
... to a 2D location on our monitor (such as S_1).*

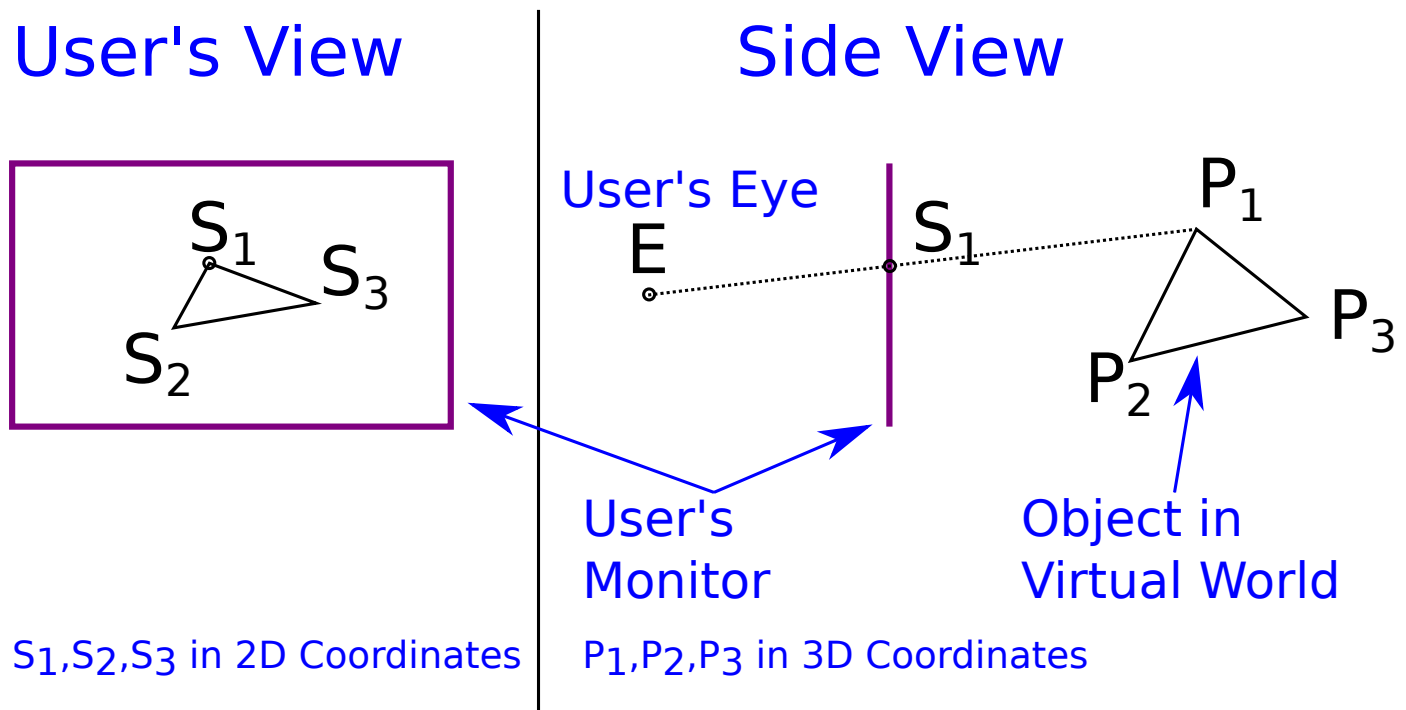

$$S_1 = T_{\text{projection}} P_1$$

Projection Types

Vague definitions on this page.

Perspective Projection

Points appear to be in “correct” location,...

... as though monitor were just a window into the simulated world.

This projection used when realism is important.


Orthographic Projection

A projection without perspective foreshortening.

This projection used when a real ruler will be used to measure distances.

Lets put user and user's monitor in world coordinate space:

- Location of user's eye: E .
- A point on the user's monitor: Q .
- Normal to user's monitor pointing away from user: \hat{n} .

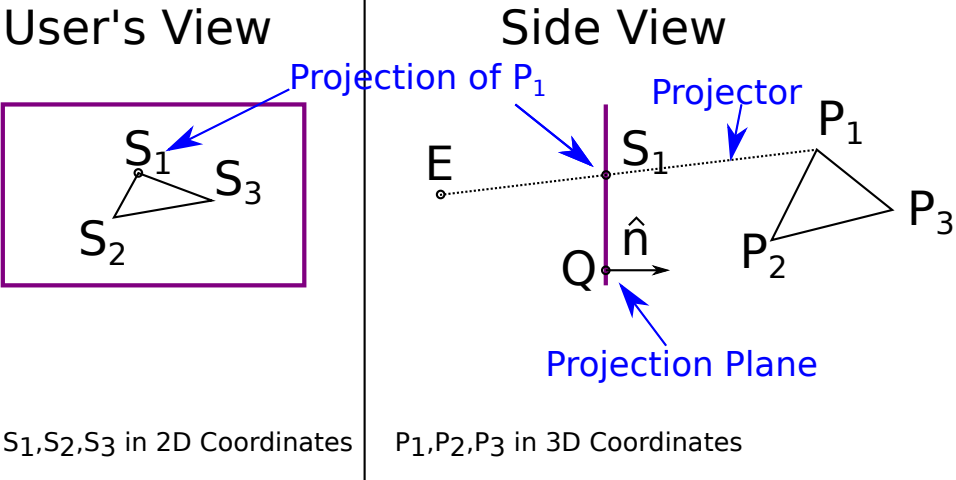

Goal:

- Find S_1** , point where line from E to P_1 intercepts monitor (plane Q, \hat{n}).
- Line from E to P called the *projector*.
- The user's monitor is in the *projection plane*.
- The point S is called the *projection* of point P on the projection plane.

Solution:

Projector equation: $S = E + t\overrightarrow{EP}$.

Projection plane equation: $\overrightarrow{QS} \cdot n = 0$.


Find point S that's on projector and projection plane:

$$\overrightarrow{Q(E + t\overrightarrow{EP})} \cdot n = 0$$
$$(E + t\overrightarrow{EP} - Q) \cdot n = 0$$
$$\overrightarrow{QE} \cdot n + t\overrightarrow{EP} \cdot n = 0$$
$$t = \frac{\overrightarrow{EQ} \cdot n}{\overrightarrow{EP} \cdot n}$$
$$S = E + \frac{\overrightarrow{EQ} \cdot n}{\overrightarrow{EP} \cdot n} \overrightarrow{EP}$$


$S_1, S_2, S_3 \text{ in 2D Coordinates}$

$P_1, P_2, P_3 \text{ in 3D Coordinates}$

User's View



Side View

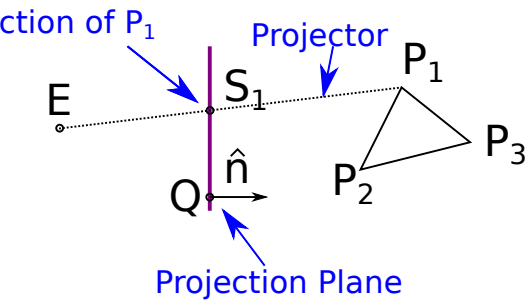

Note: $\overrightarrow{EQ} \cdot n$ is distance from user to plane in direction n ...
... and $\overrightarrow{EP} \cdot n$ is distance from user to point in direction n .

To simplify projection:

Fix $E = (0, 0, 0)$: Put user at origin.

Fix $n = (0, 0, 1)$: Make “monitor” parallel to xy plane.

Before:
$$S = E + \frac{\overrightarrow{EQ} \cdot n}{\overrightarrow{EP} \cdot n} \overrightarrow{EP}$$

After:
$$S = \frac{q_z}{p_z} P,$$

where q_z is the z component of Q , and p_z defined similarly.

The key operation in perspective projection is dividing out by z (given our geometry).

Simple Projection Transform 1

Eye at origin, projection surface at (x, y, q_z) , normal is $(0, 0, 1)$.

$$F_{q_z} = \begin{pmatrix} q_z & 0 & 0 & 0 \\ 0 & q_z & 0 & 0 \\ 0 & 0 & q_z & 0 \\ 0 & 0 & 1 & 0 \end{pmatrix}$$

Applying the projection to coordinate $(x, y, z, 1)$:

$$F_{q_z} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} q_z x \\ q_z y \\ q_z z \\ z \end{bmatrix} = \begin{bmatrix} \frac{q_z}{z} x \\ \frac{q_z}{z} y \\ \frac{q_z z}{z} \\ 1 \end{bmatrix} = \begin{bmatrix} \frac{q_z}{z} x \\ \frac{q_z}{z} y \\ q_z \\ 1 \end{bmatrix}$$

This maps the z coordinate to the constant $q_z \dots$
 \dots meaning that the position along the z axis has been lost.

But we'll need the z position to determine visibility of overlapping objects.

Simple Projection Transform, *Preserving* z

Eye at origin, projection surface at (x, y, q_z) , normal is $(0, 0, 1)$.

$$F_{q_z} = \begin{pmatrix} q_z & 0 & 0 & 0 \\ 0 & q_z & 0 & 0 \\ 0 & 0 & 0 & q_z \\ 0 & 0 & 1 & 0 \end{pmatrix}$$

Applying the projection to coordinate $(x, y, z, 1)$:

$$F_{q_z} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} q_z x \\ q_z y \\ q_z \\ z \end{bmatrix} = \begin{bmatrix} \frac{q_z}{z} x \\ \frac{q_z}{z} y \\ \frac{q_z}{z} \\ 1 \end{bmatrix}$$

This maps z coordinate to q_z/z , ...

... which though a reciprocal, will still be useful.

View-Volume Related Definitions

View Volume:

Parts of the scene which should be visible to the user.

Frustum:

A shape constructed by slicing off the top of a square-base pyramid with a plane parallel to the base.

Frustum View Volume Motivation

Consider the simple projection transformation:

Shape of view volume consists of two pyramids ...

... one pyramid in front, the other in back, ...

... and both points on eye.

Some points are behind the user...

... and we don't want these to be visible (because they would be unnatural).

Some points in view volume are so far from the user...

... that they would be invisible.

For example, points might form a triangle that covers 1% of a pixel.

These points waste computing power.

Frustum View Volume

View volume in shape of frustum with smaller square on projection plane.

The smaller square of frustum defines a *near plane*.

The larger square defines a *far plane*.

Variables describing a frustum view volume:

n : Distance from eye to near plane.

f : Distance from eye to far plane.

Coordinates of lower-left corner of $(l, b, -n)$.

Coordinates of upper-right corner of $(r, t, -n)$.

Frustum Perspective Transform

Given six values: l, r, t, b, n, f (left, right, top, bottom, near, far).

Eye at origin, projection surface at (x, y, n) , normal is $(0, 0, -1)$.

Viewer screen is rectangle from $(l, b, -n)$ to $(r, t, -n)$.

Points with $z > -t$ and $z < -f$ are not of interest.

$$F_{l,r,t,b,n,f} = \begin{pmatrix} \frac{2n}{r-l} & 0 & \frac{r+l}{r-l} & 0 \\ 0 & \frac{2n}{t-b} & \frac{t+b}{t-b} & 0 \\ 0 & 0 & -\frac{f+n}{f-n} & -2\frac{fn}{f-n} \\ 0 & 0 & -1 & 0 \end{pmatrix}$$