

# EE 4702-1, GPU Programming

## When / Where

- Here (225 Tureaud Hall), MWF 14:30-15:20 Fall 2016
- <http://www.ece.lsu.edu/koppel/gpup/>

## Offered By David M. Koppelman

- Room 345 ERAD
- Office Hours: Monday-Friday 15:30-16:30

## Prerequisites by topic:

- C++.

# GPU Definition

## GPU: Graphics Processing Unit

- Runs 3D graphics in place of CPU...  
... because it's much better at it.
- Also runs scientific-style computation in place of CPU.

## GPU is Main Component of Video Cards

## Major Companies and Brands

- NVIDIA
- ATI (Compaq/HP)

# This Course

## Focus is on GPU programming




- *Shader* programming with *OpenGL Shader Language (OGSL)*.
- *GPGPU* programming with *CUDA*.

## Also Some 3D Graphics, Game Physics

- Will cover enough graphics, OpenGL, and CUDA to do cool stuff.

## Game Physics Term Project

## Past Student Project Screenshots:

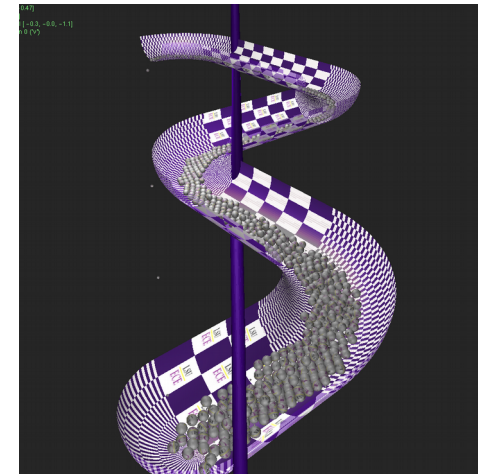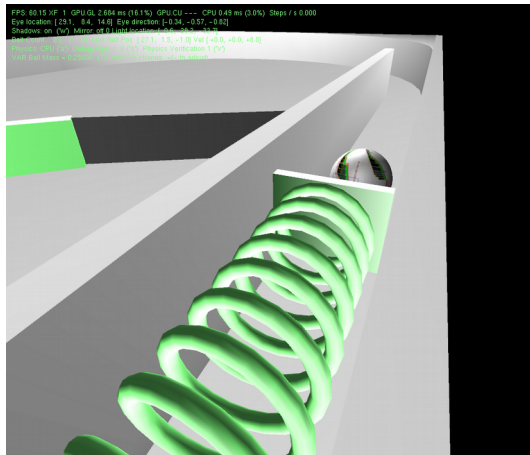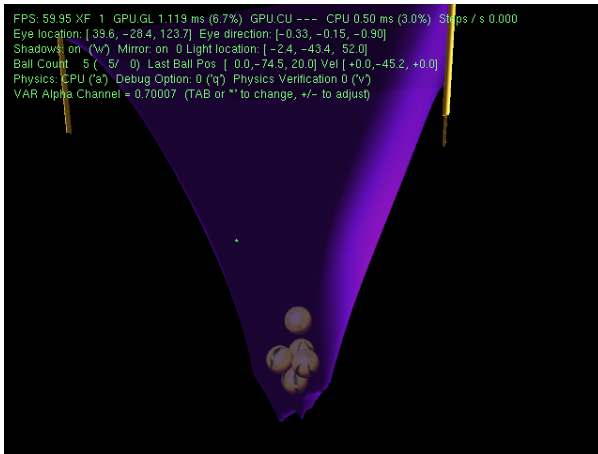


# Balloon Demo

## Simulation of a balloon.

GPU always runs 3D graphics.


Code can switch between CPU-only and CPU/GPU physics.

Term project can be an extension of this code.

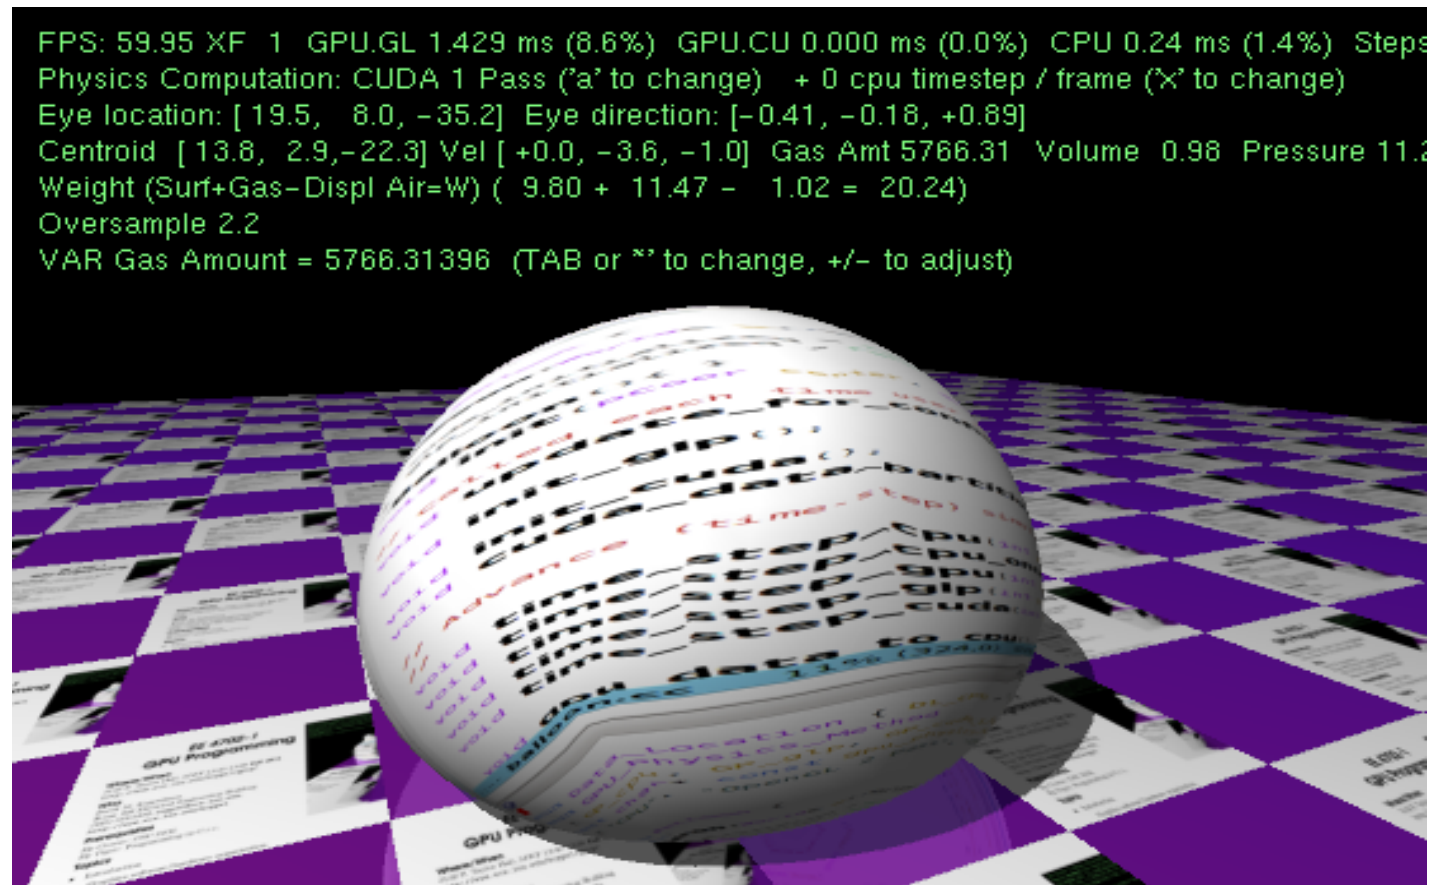

# System Overview


Quick look at how the GPU fits into the larger system...

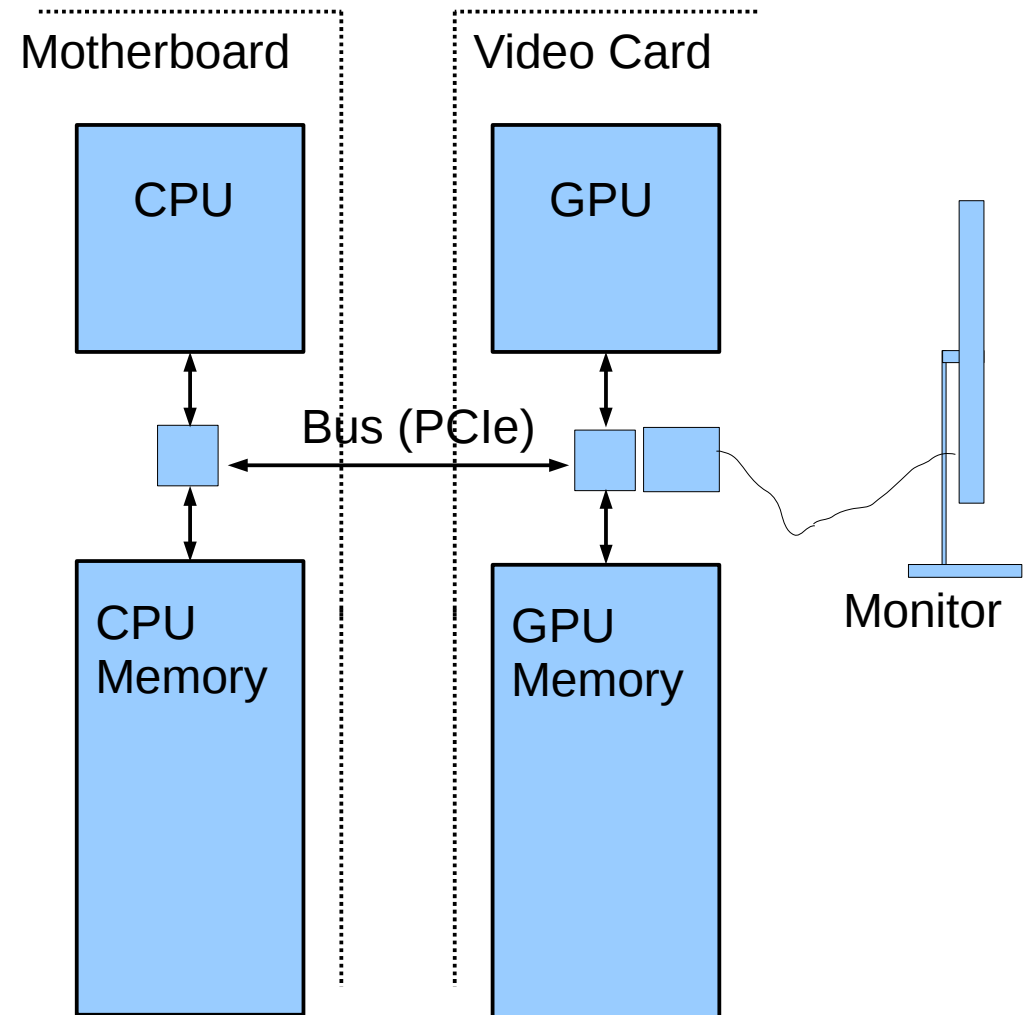

# System Overview: Hardware

## Typical Hardware

- On Computer motherboard: CPU, CPU Memory
- On Video Card GPU, GPU Memory
- Connection between CPU/GPU via Bus, e.g., PCI Express (PCIe).
- Connection from video card to monitor.

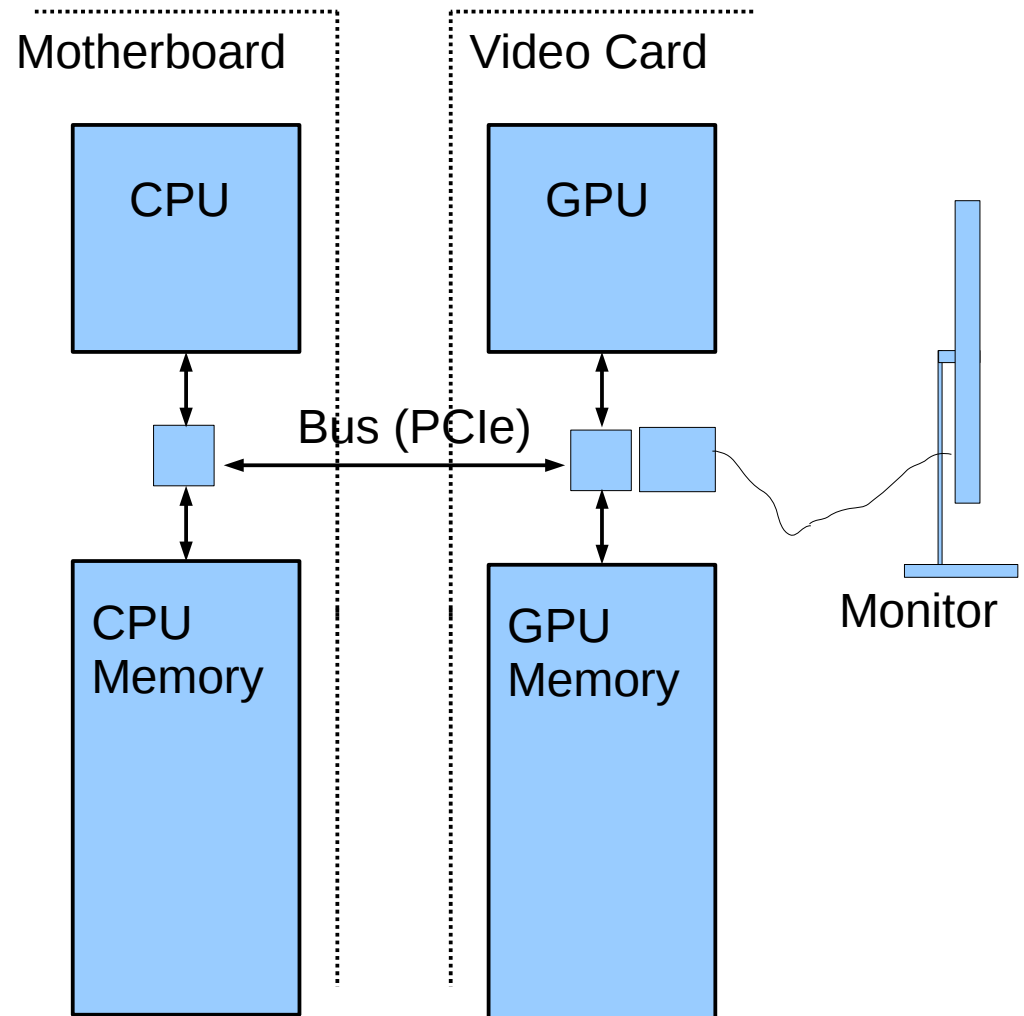

# System Overview: Frame Buffer

## *Frame Buffer*

- Area of memory continuously converted to a video signal.
- Simple mapping from memory address to pixel coordinate.

## Older Systems

- Frame buffer in CPU memory.
- Application programs wrote frame buffer directly.


## Typical Current Systems

- Frame buffer in GPU memory.
  - Frame buffer written by GPU hardware (typical)...
- ... at end of long chain of events initiated by application.

# System Overview: Frame Buffer

## Frame Buffer Contents

- Position in FB corresponds to particular pixel on display.
- In illustration, first FB element is upper-left pixel.
- A common FB element size is 32 bits.
- Frame buffer format varies with video mode and of course system.

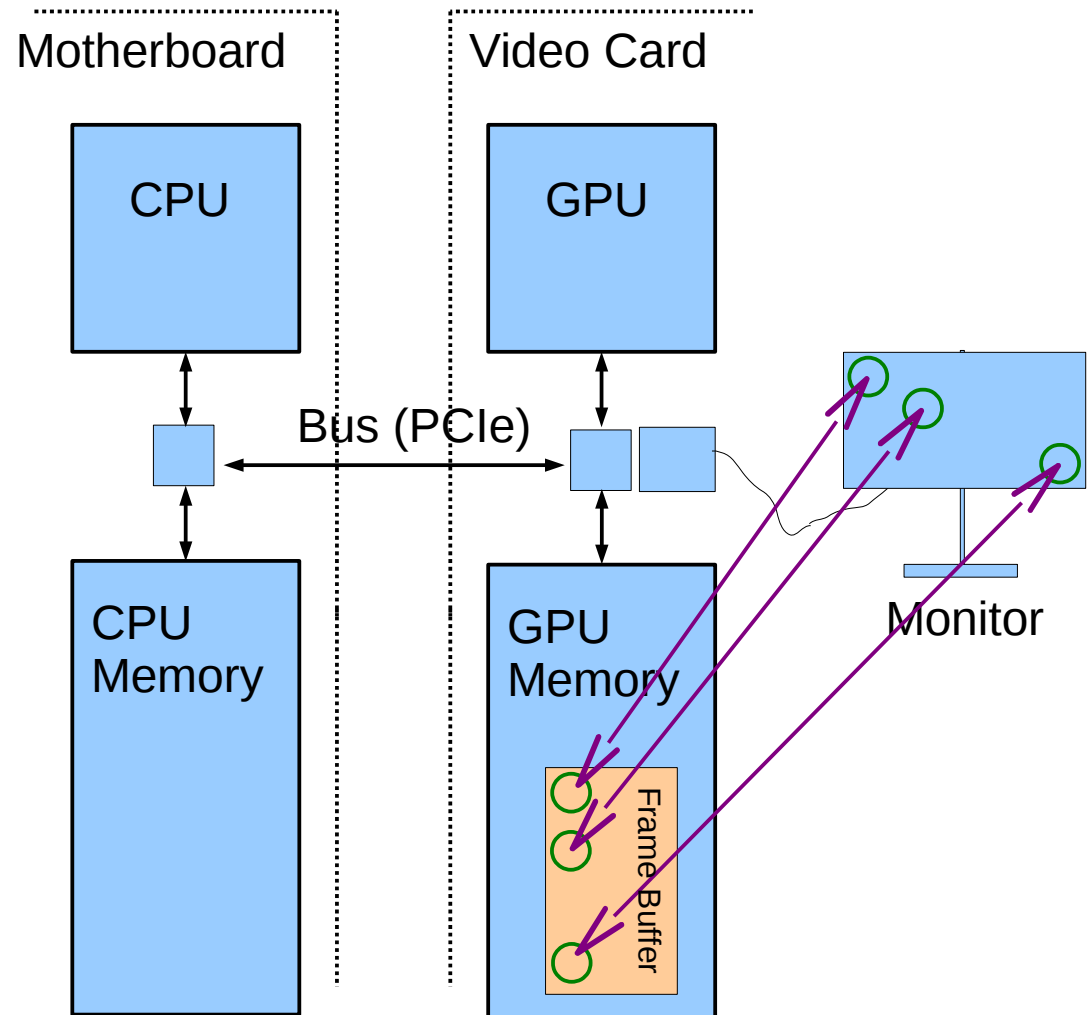



# Simple Frame Buffer Code Example

## Consider Code

- `frame_buffer[10][20] = 0;`

## For Simple Code Example Assume

- The frame buffer is in CPU memory.
- Array `frame_buffer` points to the frame buffer location.
- Writing a “1” to the array makes a pixel white.
- Writing a “0” to the array makes a pixel black.

# Simple Frame Buffer Example

```
// Make screen all white. (Assume 1 is white.)
```


```
//
```

```
for ( int x = 0; x < width; x++ )  
    for ( int y = 0; y < height; y++ )  
        frame_buffer[x][y] = 1;
```

```
// Draw a black diagonal line.
```

```
//
```

```
for ( int x = 0; x < height; x++ )  
    frame_buffer[x][x] = 0;
```

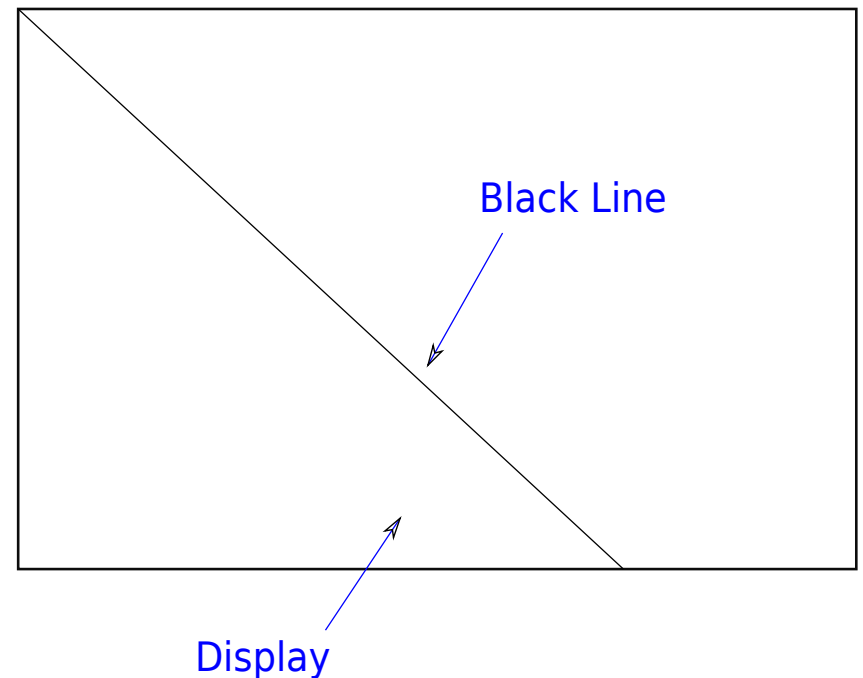

# GPU Rationale

Code on prior slide looked simple.

How much more complex would balloon code be?

A lot, of course!

That's half of the motivation for a GPU:

- Graphics (3D animated, especially) requires a lot of computation.
- CPU is less suited for that kind of computation.

# System Overview: Code Organization

## Simplified View of Code on Typical System

### Who Wrote Code?

- User. (Call it the Ap.)
- Vendor of GPU. (Call it the driver.)

### Where Does It Run?

- CPU
- GPU


### All Four Possible:

- User/CPU, User/GPU, Vendor/CPU, Vendor/GPU

# System Overview: Software

## Just For Today, Oversimplify to Two Kinds of Software

- *Application Program* (Ap for short\*)
  - Written by ap. programmer.
  - E.g., Balloon Demo
  - Most of Ap runs on CPU.
  - Part of Ap may also run on GPU.
- *GPU Driver* (Driver or Dr for short)
  - Written by GPU manufacturer.
  - E.g., NVIDIA 185.18.14
  - Driver code runs on both CPU and GPU.
  - Most work done by driver code that runs on GPU.

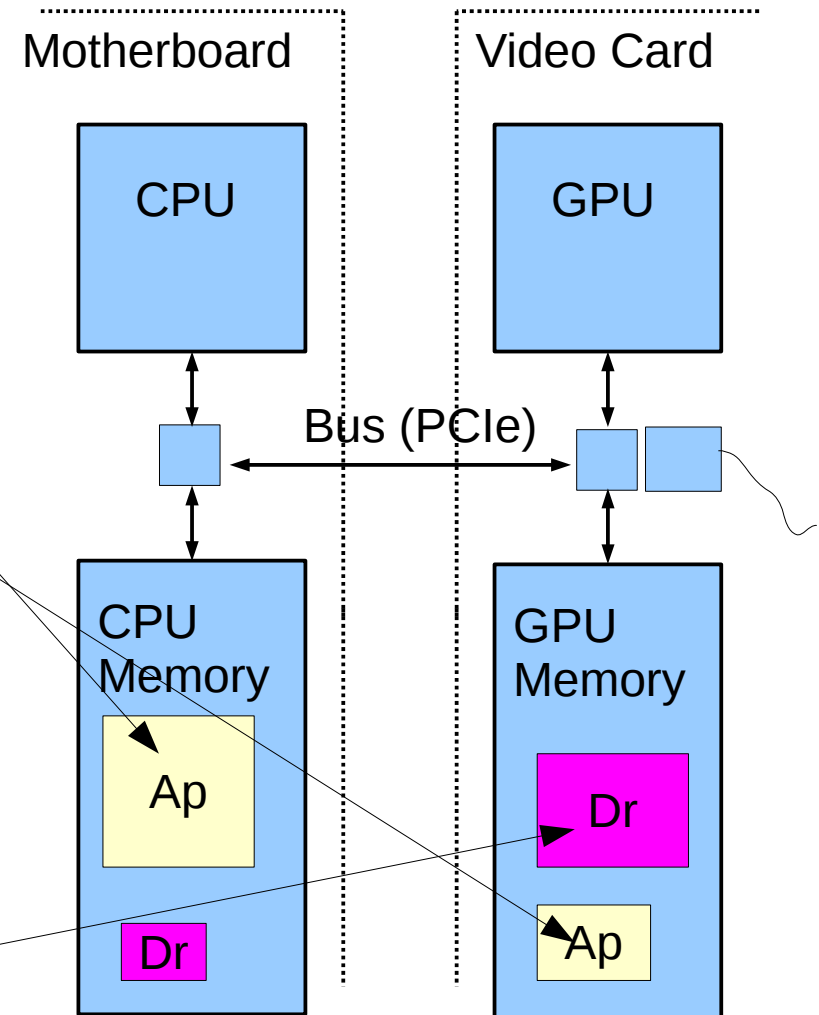

# System Overview: Running of Application

## Typical Execution

- Application, running on CPU, ready to emit next frame.
- App. calls driver on CPU...
  - ...driver on CPU starts more driver code on GPU...
  - ...application resumes on CPU (while GPU driver code still running).
- Process above repeated many times for a frame.
- Driver code ultimately will write frame buffer.


## Important Points

- CPU and GPU can run code at same time.

# System Overview: Execution Activities

## Example Below

- Ap calls driver three times.
- First two times, driver does all work, mostly on GPU.
- Third time that ap calls driver, driver starts some ap code on GPU.

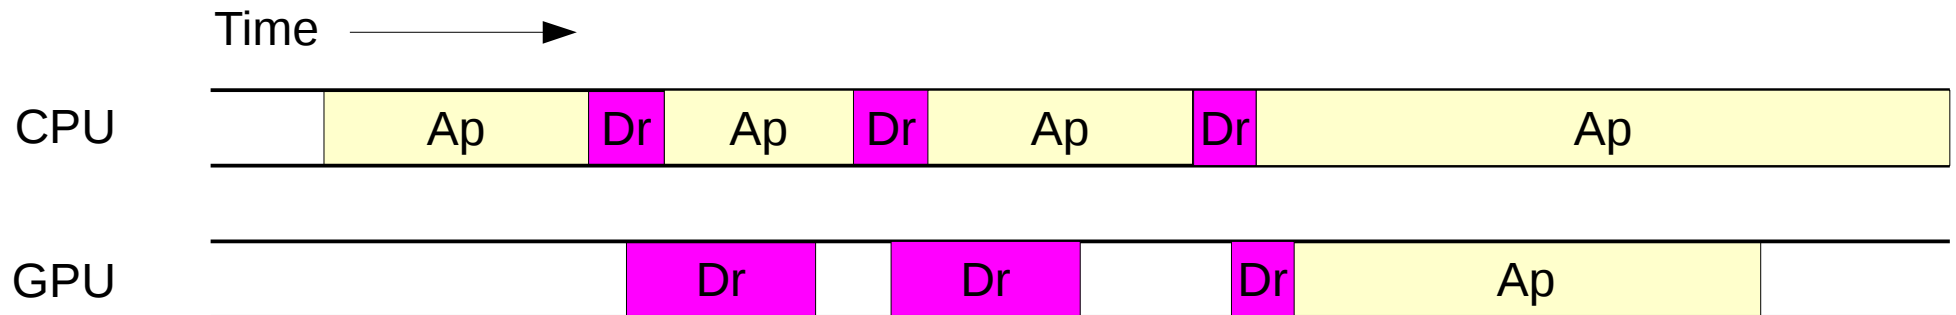

# Course Coverage

Emphasis: GPU coding for high performance.

Topics Needed For Term Project (a dynamic simulation)

## Topics

- Rudiments of Animation by Dynamic Simulation
- Term Project
- 3D Graphics basics: coordinates, transforms, primitives, colors, textures.
- Data movement and staging, efficiency.
- Coding with GPU *shader* model, CPU/GPU load balancing.
- Coding with CUDA, GPU physics.



# Graphics Equipment

For assignments, use equipment in Workstation Lab

## Workstation Lab

- Live Status Updates: <http://www.ece.lsu.edu/koppel/gpup/sys-status.html>
- Room 126 EE Building
- Several kinds of computers.

## Graphics Workstations

- Mix of recent high-end graphics GPUs.
- Some machines have scientific-computing-grade GPUs.